

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU05/000255

International filing date: 28 February 2005 (28.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: AU
Number: 2004901016
Filing date: 27 February 2004 (27.02.2004)

Date of receipt at the International Bureau: 12 April 2005 (12.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/AU2005/000255

Australian Government

Patent Office
Canberra

I, JANENE PEISKER, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2004901016 for a patent by BQT SOLUTIONS PTY LTD as filed on 27 February 2004.

I further certify that the name of the applicant has been amended to BQT SOLUTIONS (AUSTRALIA) PTY LTD pursuant to the provisions of Section 104 of the Patents Act 1990.



WITNESS my hand this
Fifth day of April 2005

A handwritten signature in black ink, appearing to read 'J. Peisker'.

JANENE PEISKER
TEAM LEADER EXAMINATION
SUPPORT AND SALES

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:

An Access Control System

Name and Address of Applicant:

BQT Solutions Pty Ltd, an Australian company, ACN 072 066 641, of Unit 5,
12-18 Victoria Street East, Lidcombe, New South Wales, 2141, Australia

Names of Inventors:

Christopher Ian Blake and Karthik Sivaram

This invention is best described in the following statement:

AN ACCESS CONTROL SYSTEM

FIELD OF THE INVENTION

5 The present invention relates generally to security systems and in particular to access control systems.

BACKGROUND

10 Existing controlled access systems utilize a controller in a secure area that is connected to a relay coupled to a door lock that is also in the secure area. Normally, the relay is on the controller. The controller is coupled to a reader, where the reader is in an unsecured area. Another configuration involves a reader with a relay in the same unit, where the relay is in the unsecured area. Figs. 7A and 7B are block diagrams of each of these systems, respectively

15 Fig. 7A illustrates a controller 740 with a relay on board in the secure area 720. The reader 730 is located in the unsecured area 710 and communicates with the controller 740, for example, using Wiegand communications. The controller 740 with the relay is in turn coupled to a door latch 750 in the secure area 720. In operation, the reader 730 sends an access number to the controller 740, which looks up the
20 number in a database and determines the access level that is appropriate. If access is granted, the controller 740 enables the relay to activate the door latch 750.

25 Fig. 7B illustrates a reader 760 with the database and the relay on board the reader in the unsecured area 710, while the door latch 780 is in the secure area 720. If the reader 760 determines that access is to be granted, the reader 760 enables the relay on board the reader 760 to activate the door latch 780.

30 Both of these systems have disadvantages. The system of Fig. 7A involves use of controllers that makes the security systems expensive and the use of Wiegand communications, where Wiegand is a known format and therefore a weak link. Wiegand lines are a "weak link" in the sense that Wiegand formats are normally known formats, such as 26 bits. A code generator is able to simulate sending codes to a controller if the reader is removed from the wall, for example, and Wiegand format

signals may be sent down the Wiegand lines to defeat the system. The system of Fig. 7B involves a relay on board the reader. Thus, a 5V power supply for example may be used to activate the door relay from the unsecured area.

5

SUMMARY

In accordance with an aspect of the invention, there is provided a relay module for connection to a door latch in a secure area. The relay module comprises a micro-controller decrypting encrypted communications from a reader in an unsecured area and comparing the decrypted communications to an expected code, and a relay
10 coupled to the micro-controller switching power to actuate the door latch if the comparison of the decrypted communications and the expected code indicates a correct match.

The relay module and the door latch may be a single module.

The micro-controller may enable the relay if the comparison indicates a
15 correct match. If the relay is enabled, power runs through the door latch to unlock a door.

The relay module may further comprise at least one buffer coupled to the micro-controller for receiving the encrypted communications from the reader. The buffer protects the micro-controller from being damaged if a spike occurs in the
20 communications between the reader and the relay module. The buffer may rectify any voltage level drop between the reader and the relay module.

In accordance with another aspect of the invention, there is provided a method of switching a door latch in a secure area. The method comprises the steps of decrypting encrypted communications from a reader in an unsecured area and
25 comparing the decrypted communications to an expected code, and switching power to actuate the door latch if the comparison of the decrypted communications and the expected code indicates a correct match.

A micro-controller may implement the decrypting and comparing steps. A relay coupled to the micro-controller may implement the switching step. The relay
30 module and the door latch may be a single module. The micro-controller enables the

relay if the comparison indicates a correct match. If the relay is enabled, power runs through the door latch to unlock a door.

The method may further comprise the step of receiving the encrypted communications from the reader. At least one buffer coupled to the micro-controller
5 may implement the receiving step. The buffer protects the micro-controller from being damaged if a spike occurs in the communications between the reader and the relay module. The buffer may rectify any voltage level drop between the reader and the relay module.

In accordance with a further aspect of the invention, there is provided an
10 access control system, comprising: a reader located in an unsecured area for determining access rights in response to presentation of a card and generating encrypted communications; a relay module located in a secure area for receiving the encrypted communications from the reader, decrypting the encrypted
15 communications, and comparing the decrypted communications to an expected code; a door latch coupled to the relay module, the door latch actuated by the relay module switching power if the comparison of the decrypted communications and the expected code indicates a correct match.

The generated encrypted communications comprises an access command for the relay module.

20 The door latch may be directly connected to the relay module. The relay module and the door latch may be a single module.

The reader may comprise logic functions and a database residing in the reader. The database may hold information including access times, users, hot-listing, holidays, and the like. The reader may be autonomous if communications are cut or a
25 master computer is brought down.

The reader may be a smartcard reader and the card may be a smartcard. The smartcard may implement an anti-passback feature.

The reader may be a biometric reader.

The relay module may be a storage relay module.

30 The relay module may comprise: a micro-controller for decrypting encrypted communications from a reader in an unsecured area and for comparing the decrypted

communications to an expected code; and a relay coupled to the micro-controller for switching power to actuate the door latch if the comparison of the decrypted communications and the expected code indicates a correct match.

5 The relay module may further comprise at least one buffer coupled to the micro-controller for receiving the encrypted communications from the reader.

The communications may be encrypted using 128-bit AES, 3DES, DES, or skipjack.

10 In accordance with still a further aspect of the invention, there is provided a method of controlling access to a secure area. The method comprises the steps of: determining access rights using a reader located in an unsecured area in response to presentation of a card and generating encrypted communications; receiving the encrypted communications from the reader using a relay module located in a secure area for, decrypting the encrypted communications, and comparing the decrypted communications to an expected code; actuating a door latch coupled to the relay
15 module using the relay module by switching power if the comparison of the decrypted communications and the expected code indicates a correct match.

The generated encrypted communications may comprise an access command for the relay module.

20 The door latch may be directly connected to the relay module. The relay module and the door latch may be a single module.

The reader may comprise logic functions and a database residing in the reader. The database may hold information including access times, users, hot-listing, holidays, and the like. The reader may be autonomous if communications are cut or a master computer is brought down. The reader may be a smartcard reader, and the
25 card may be a smartcard. The smartcard may implement an anti-passback feature.

The reader may be a biometric reader.

The relay module may be a storage relay module.

30 The relay module may comprise: a micro-controller for decrypting encrypted communications from a reader in an unsecured area and for comparing the decrypted communications to an expected code; and a relay coupled to the micro-controller for

switching power to actuate the door latch if the comparison of the decrypted communications and the expected code indicates a correct match.

The relay module may further comprise at least one buffer coupled to the micro-controller for receiving the encrypted communications from the reader.

5 The communications may be encrypted using 128-bit AES, 3DES, DES, or skipjack.

BRIEF DESCRIPTION OF THE DRAWINGS

10 A number of embodiments of the invention are described hereinafter with reference to the drawings, in which:

Fig. 1 is a block diagram of an access control system in accordance with an embodiment of the invention;

Fig. 2 is a block diagram of an access control system in accordance with another embodiment of the invention;

15 Fig. 3 is a block diagram illustrating operation of the embodiments of Figs. 1 and 2;

Fig. 4 is a block diagram illustrating the details of the relay module of Fig. 1;

Fig. 5 is a block diagram illustrating the configuration of an access control system with several readers;

20 Fig. 6 is a block diagram illustrating the configuration of an access control system with several readers using an RS485 hub; and

Figs. 7A and 7B are block diagrams illustrating operation of a controller with a relay on board and a reader with a relay on board, respectively.

25 DETAILED DESCRIPTION

The embodiments of the invention provide an access control system and software package. The access control system includes the following functionality: remote reader updating, encrypted communications, a relay module, and the ability to incorporate biometrics on a smartcard. Any of a number of readers may be practiced,
30 such as the BQT Solutions BT816, BT843, and BT910 readers

The embodiments of the invention have a number of advantageous features, including encrypted communications. The embodiments of the invention enable doors to be physically secured using a memory system that resides on a reader. In particular, the logic functions and the database reside on the reader. The database is
5 contained within the reader and holds access times, users, hot-listing, holidays, etc. The reader is autonomous if communications are cut or the master computer is brought down. The resulting relay module increases security as the relay module enables encrypted communications.

Fig. 1 is a block diagram of an access control system 100 in accordance with
10 an embodiment of the invention comprising a smartcard reader 110, a relay module 120, and a door latch 130. In this embodiment, the door latch 130 and the relay module 120 are in the secure area, while the reader 110 is in the unsecured area. A smartcard may be used with the reader 110 to gain access to the secure area. If the smartcard is authorized for access, the relay module 120 actuates the door latch.
15 Importantly, communications 112 between the reader 110 and the relay module 120 are encrypted. Any of a number of encryption techniques hereinafter may be practiced.

Fig. 4 is a block diagram of a relay module 400, with which the embodiment of Fig. 1 may be practiced. The relay module 400 comprises buffers 440, a
20 micro-controller 442, and a relay 444. The relay module 400 receives communications 420 from the reader, which are input to the buffers 440, which in turn are coupled to the micro-controller 442. The micro-controller 442 operates the relay 444 in a conventional manner. The relay 444 has an output to actuate the door latch 430.

25 The relay module 410 is the equivalent of a switch. If the relay module 410 receives the correct code from the reader, the relay module 410 throws the relay 444 that unlocks the door. The buffers 440 ensure that if a spike occurs in communications between the reader and the relay module 410, the micro-controller 442 is not damaged. The buffers 440 also ensure that any voltage level lost between
30 the reader and the relay module 410 is recovered.

The micro-controller 442 decrypts the encrypted communications from the reader and compares the decrypted communications to the code expected. If this is correct, the micro-controller 442 enables the relay 444. The relay 444 switches power to actuate the door latch 430. If enabled, power runs through the door latch 430, unlocking the door.

Fig. 3 illustrates operation of the access control system 300. The reader 310 has a database on board and is located on the unsecured side. The reader 310 communicates with the relay module 320 using encrypted communications. If a user attempts to access the secure area using the reader 310, the reader 310 looks up the user data in the database and determines the access level. If the user is permitted access, the reader 310 sends an access command to the relay module 320 via the encrypted communications. In turn, the relay module 320 on the secure side activates the door latch 330.

Anti-Passback

The embodiments of the invention provide anti-passback by placing an indicator or flag on a smartcard once a user has passed through an entry door. This ensures that the same smartcard cannot be used on the same entry reader 110 until the smartcard has been presented to the exit reader. The flag is a composite bit field of the current entry status at different levels (i.e., different sets of entry and exit doors). Thus, the corresponding flag bit (if unset) is set if entering a set of entry / exit doors, and is unset, if leaving the flag bit (if set). Any violation of this principle is an anti-passback violation.

Normally, the anti-passback function is implemented on a controller, but in the embodiments of the invention is implemented partly on the reader 110 and partly on the smartcard. For software ease of use, the software has options to reset the anti-passback status of the card (ignore and set) and to disable anti-passback for a particular cardholder. Both of these options are downloaded to the reader with the use of various status bits in a cardholder's permission record.

Encrypted Communications

The system 100 can ensure that communications between a master computer and the readers are encrypted. The type of encrypted communication can be 128-bit

AES, 3DES, DES, or skipjack. Other encryption techniques may be practiced as well. The server may also provide interface management. The readers can run offline. The reader operates even if the server is down. The reader may store up to 20,000 transactions, however, other numbers of transactions may be stored without departing
5 from the scope and spirit of the invention. For example, if a larger capacity memory is used in the readers, larger numbers of transactions may be stored.

Communications Relay

The relay module 120, 410 communicates using encryption (e.g., 128-bit AES, 3DES, DES or skipjack) with a corresponding reader 110. Upon receiving an
10 activation code, the relay module 120, 410 activates the door strike 130, 430. This ensures that even with access to the power and communication wires at the back of the reader 110, access cannot be forced.

Biometrics on Card

Other embodiments of the invention can be practiced using biometrics. Fig. 2
15 illustrates an access control system 200 in accordance with a further embodiment of the invention. The access control system 200 comprises a biometric reader 210, a storage relay module (SRM) 220, and a door latch 230. Through the use of the storage relay module 220, the reader 210 can be integrated into the access control system 200. One smartcard can store all information needed for the access control
20 system 200, as well as a biometric fingerprint template. If BanqueTec BT910 readers are used throughout a facility, a biometric verification can be enforced before access is granted. The database and interfacing to the master computer is done via the Storage Relay Module (SRM) 220. The SRM 220 comprises an RS485 interface, memory for a database, and standard relay module functions. The SRM 220 has been
25 designed to minimise changes to the BQT Solutions BT910. The SRM is based on the BT816 reader, without Mifare. The BT910 sends an encrypted access code and the SRM searches its database and, if a match is found, powers the door latch through its relay. The SRM also communicates with software through an RS485 link. All database updates, functions, anti passback, etc., are kept on the SRM. The BT910
30 does not hold the database. The SRM allows any reader that does not have a database, to be used in the embodiments of the invention. The BT910 does not

contain these functions and so is complemented by the SRM 220 to be able to work on the access control system.

Access Control Systems

Fig. 5 shows one configuration of an access control system 500 in accordance with the embodiments of the invention. The details of the relay modules and the door lock are not depicted to simplify the drawing. A number of readers 520 can be coupled together using RS 485 with a terminating resistor 510 at one end. At the other end, a converter 530 may be used to convert RS 485 to USB/Serial communications, and vice versa. The converter 530 is coupled to the master computer or server 540 using RS 232 or USB communications. The computer 540 has access control software installed in the computer 540 to interface with the readers 520. A converter is used to enable communications from the computer via a serial interface (e.g., RS232 or USB) to readers on the network (e.g., RS485). Readers may be connected in parallel across an RS485 network, and a terminating resistor may be used on the end of each line to ensure good RS485 communications.

Fig. 6 shows another configuration of an access control system 600 like that of Fig. 5, but using an RS485 hub 630. In this embodiment, the hub 630 has 8 spokes but other numbers of spokes may be practiced. Each spoke has up to 30 readers 620 coupled to it, and there is a terminating resistor 610 at the end of each sequence of readers 620. The hub 630 is in turn coupled to a converter 640, which is coupled to the computer or server 650. While up to 30 readers are described with reference to the drawings, the number of readers may be much higher than 30. An installer may be able to install more than 30 readers. It will be appreciated by those skilled in the art that other numbers of spokes and readers may be practiced without departing from the spirit and scope of the invention.

By having a reader contain both smartcard reading capabilities and database abilities, the use of a controller is eliminated. Further, by using encrypted communications, the limitations of Wiegand communications is eliminated as a possible communication weak link. This allows small to medium sized companies to save while still obtaining an improved security system.

AN ACCESS CONTROL SYSTEM

ABSTRACT

5

A method of switching a door latch (130, 230, 330, 430) in a secure area, a relay module (120, 220, 320), and an access control system are disclosed. Encrypted communications from a reader (110, 210, 310, 420) in an unsecured area are decrypted, and the decrypted communications are compared to an expected code. A
10 micro-controller (442) may implement the decrypting and comparing steps. Power is switched to actuate the door latch (130, 230, 330, 430) if the comparison of the decrypted communications and the expected code indicates a correct match. A relay (444) coupled to the micro-controller (442) may implement the switching step. The relay module (120, 220, 320) and the door latch (130, 230, 330, 430) may be a single
15 module. The method may further comprise the step of receiving the encrypted communications from the reader (110, 210, 310, 420). At least one buffer (440) coupled to the micro-controller (442) may implement the receiving step.

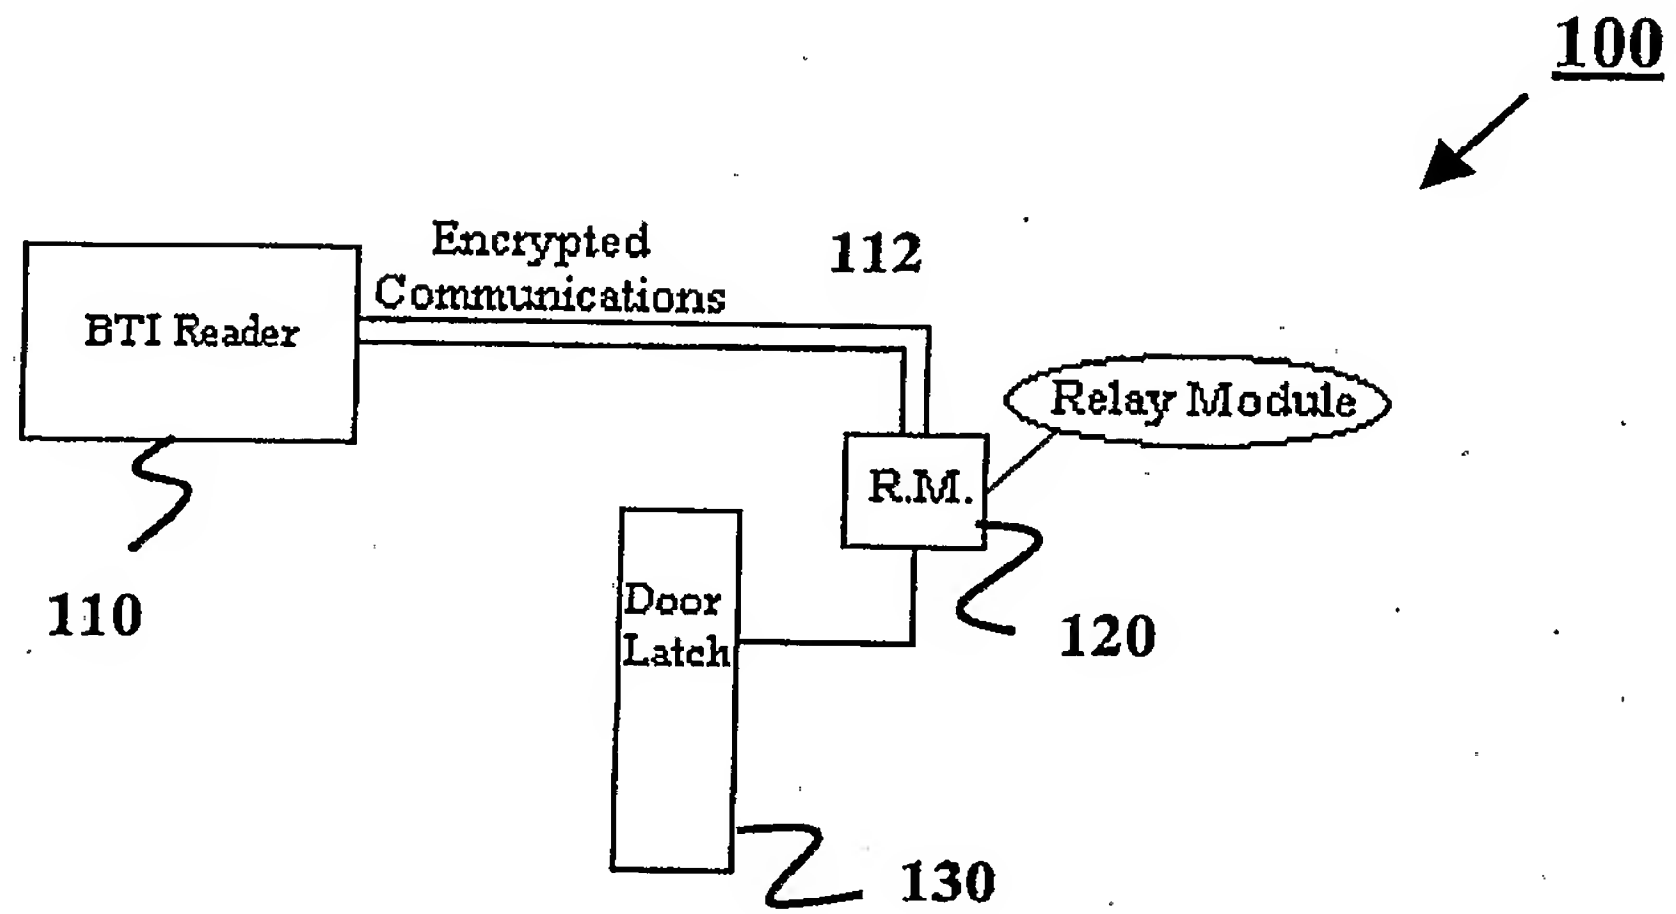


FIG. 1

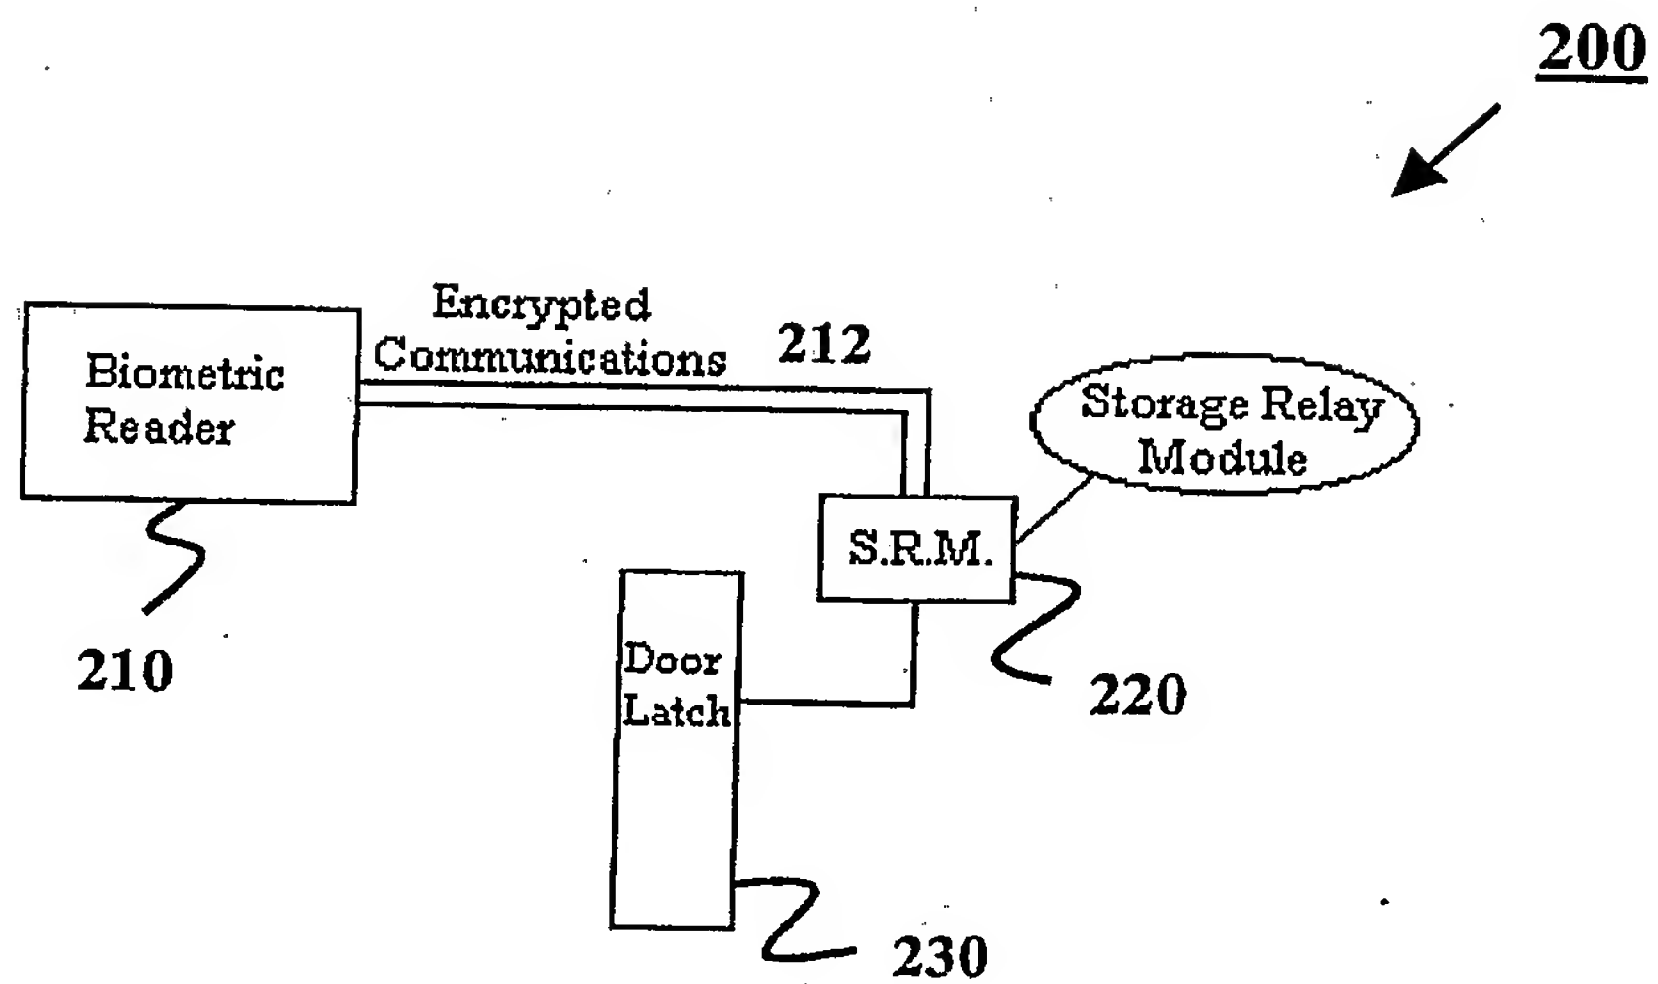


FIG. 2

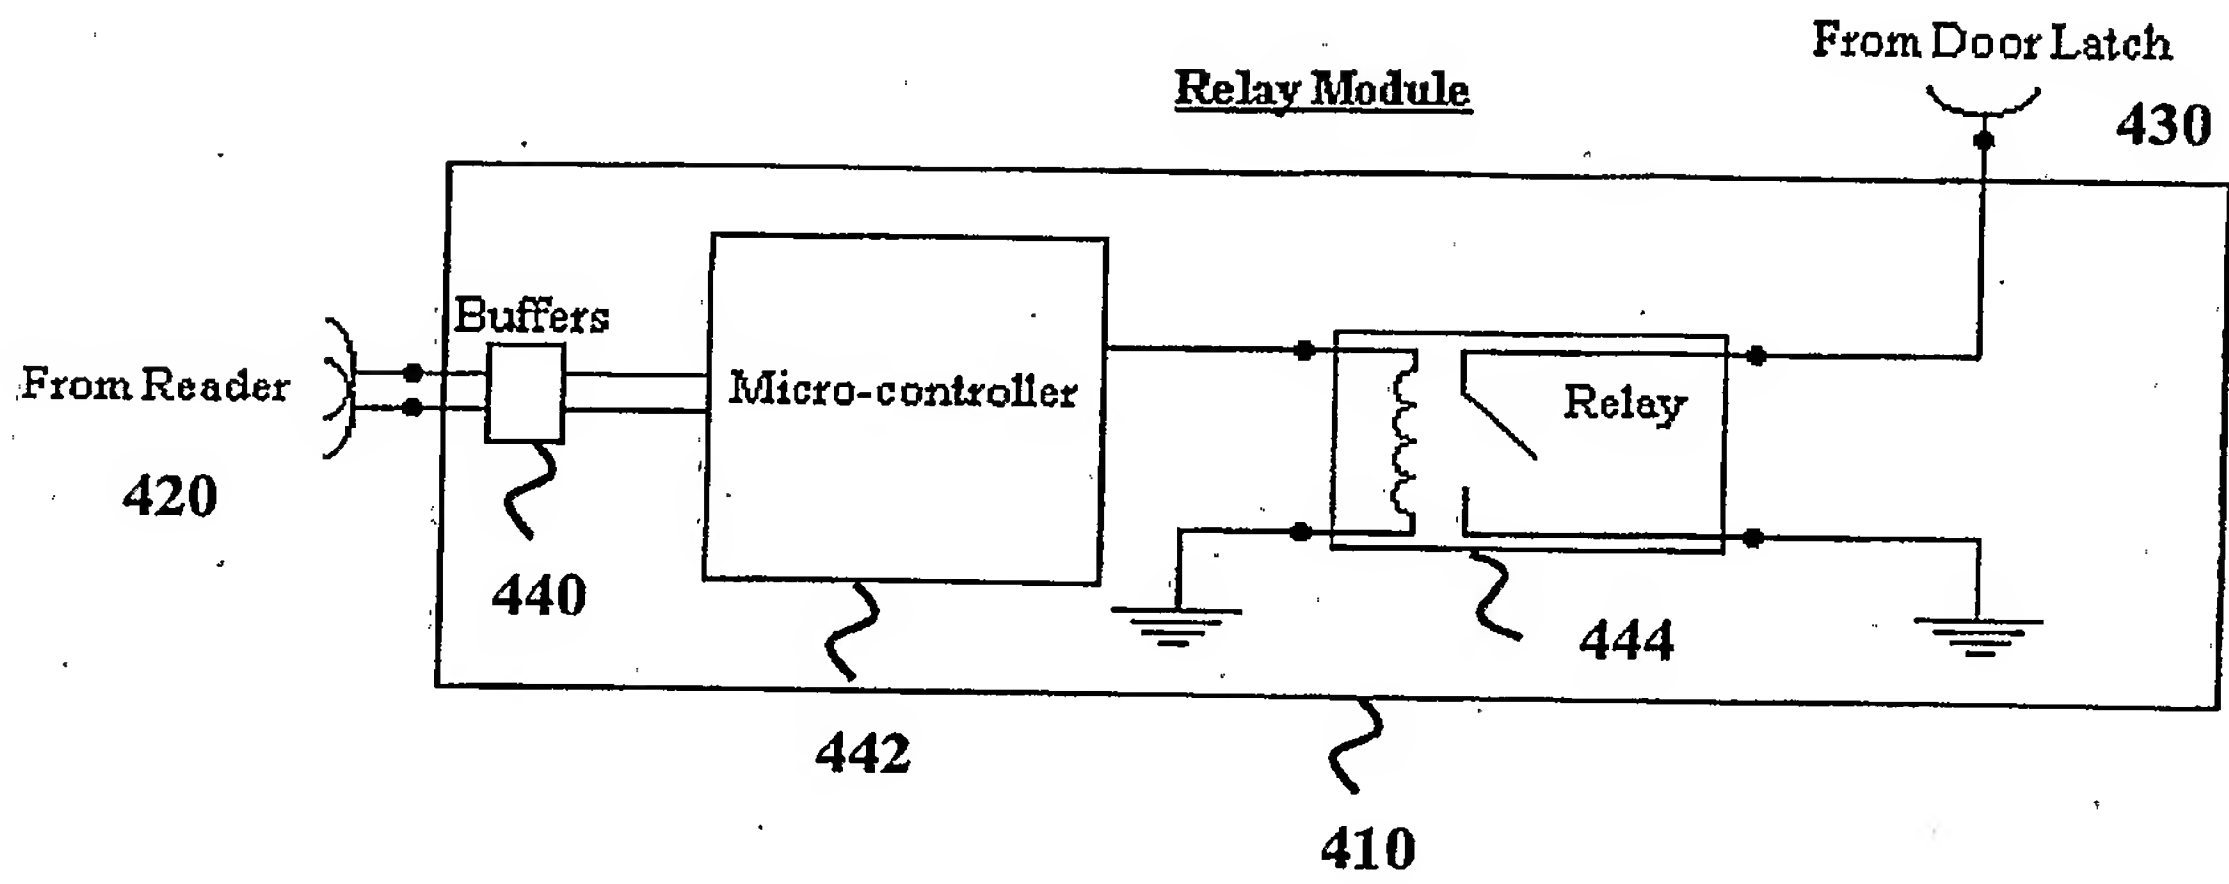
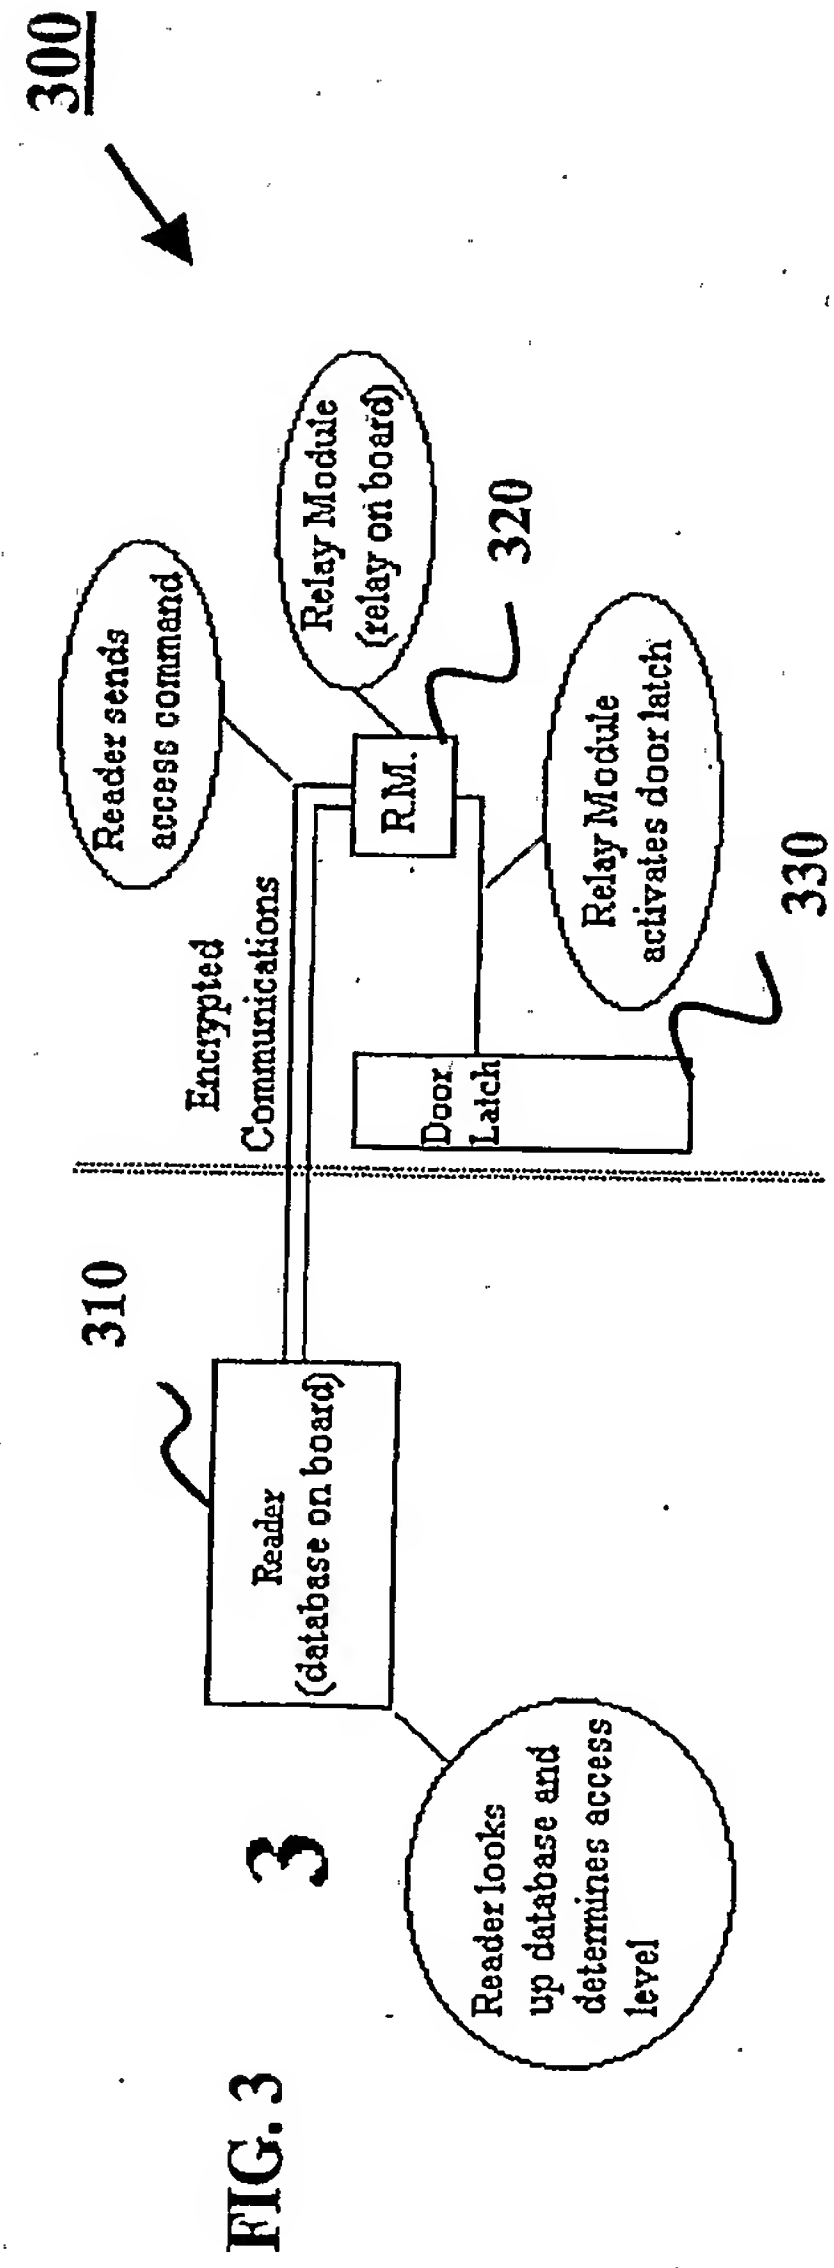
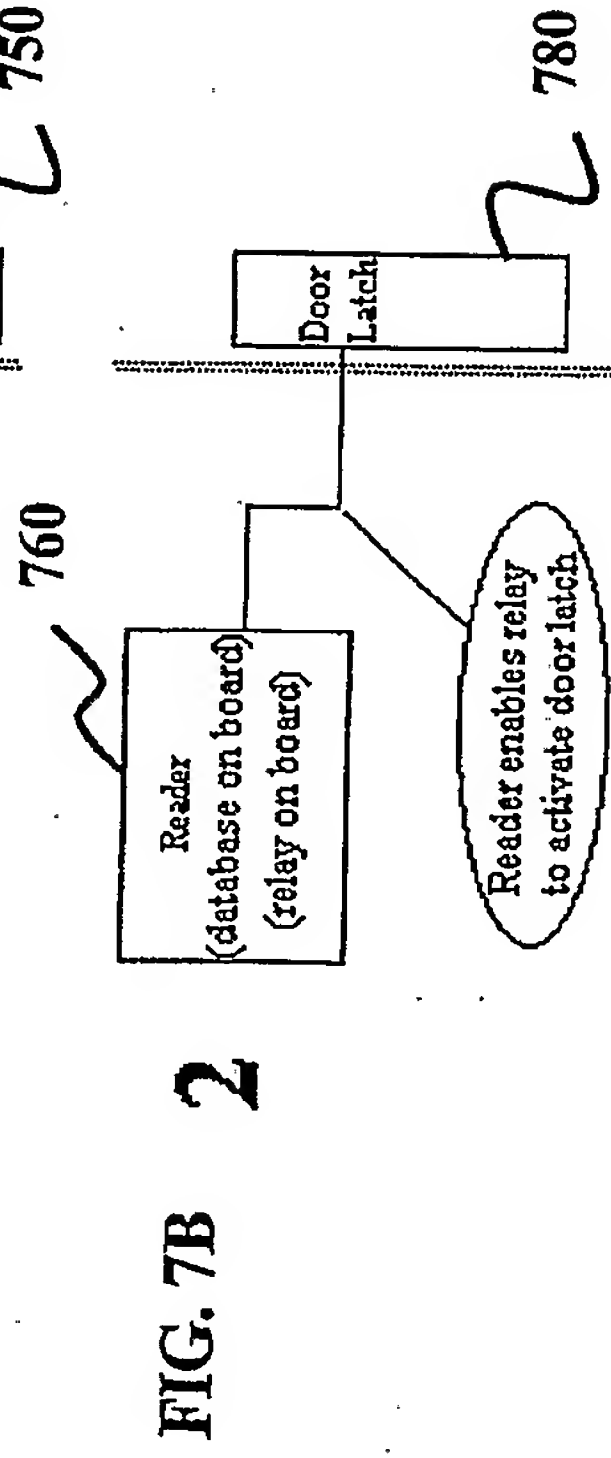
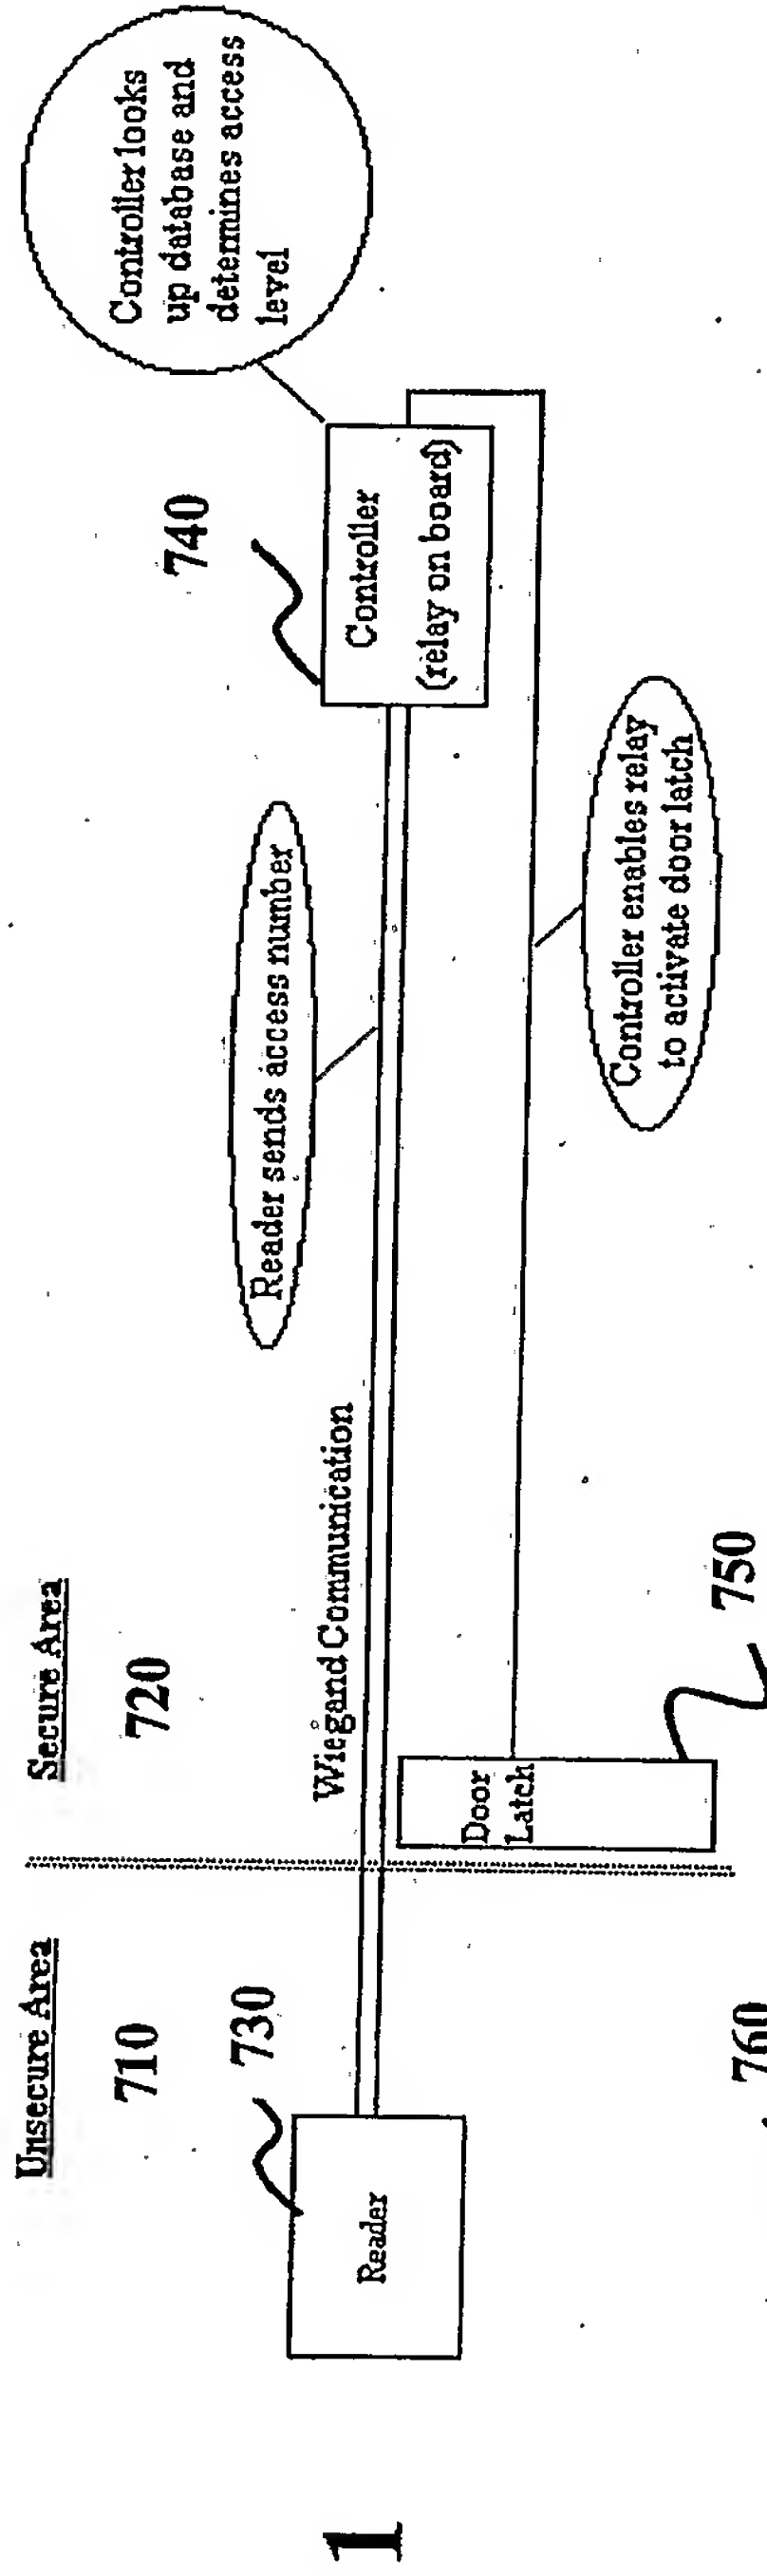


FIG. 4



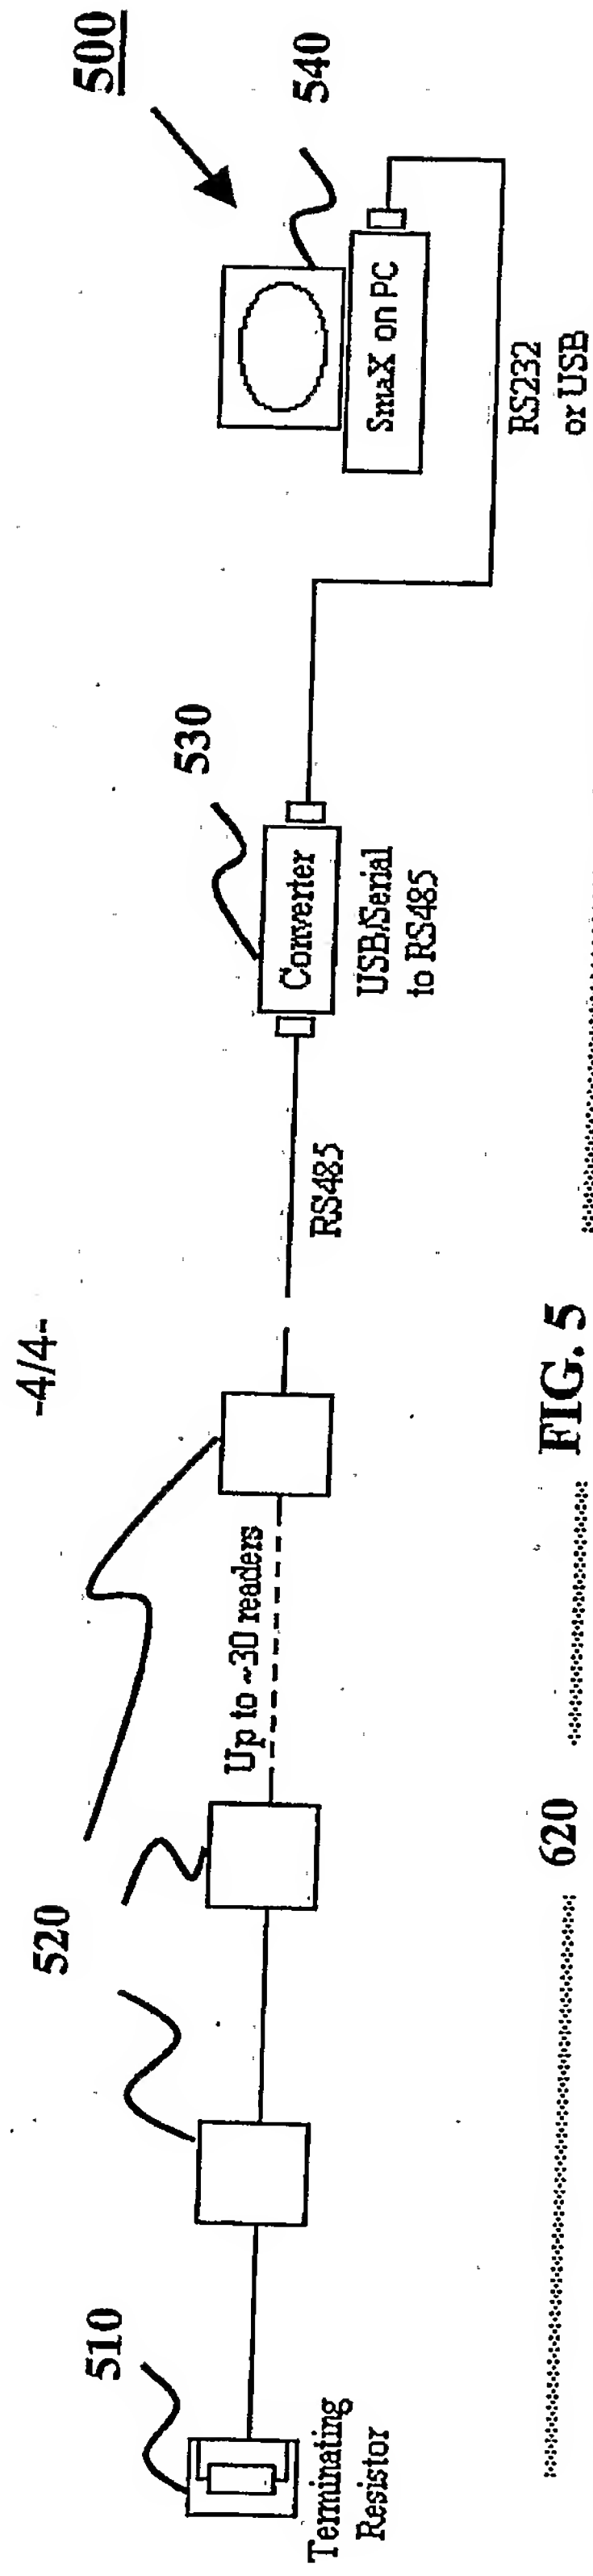


FIG. 5

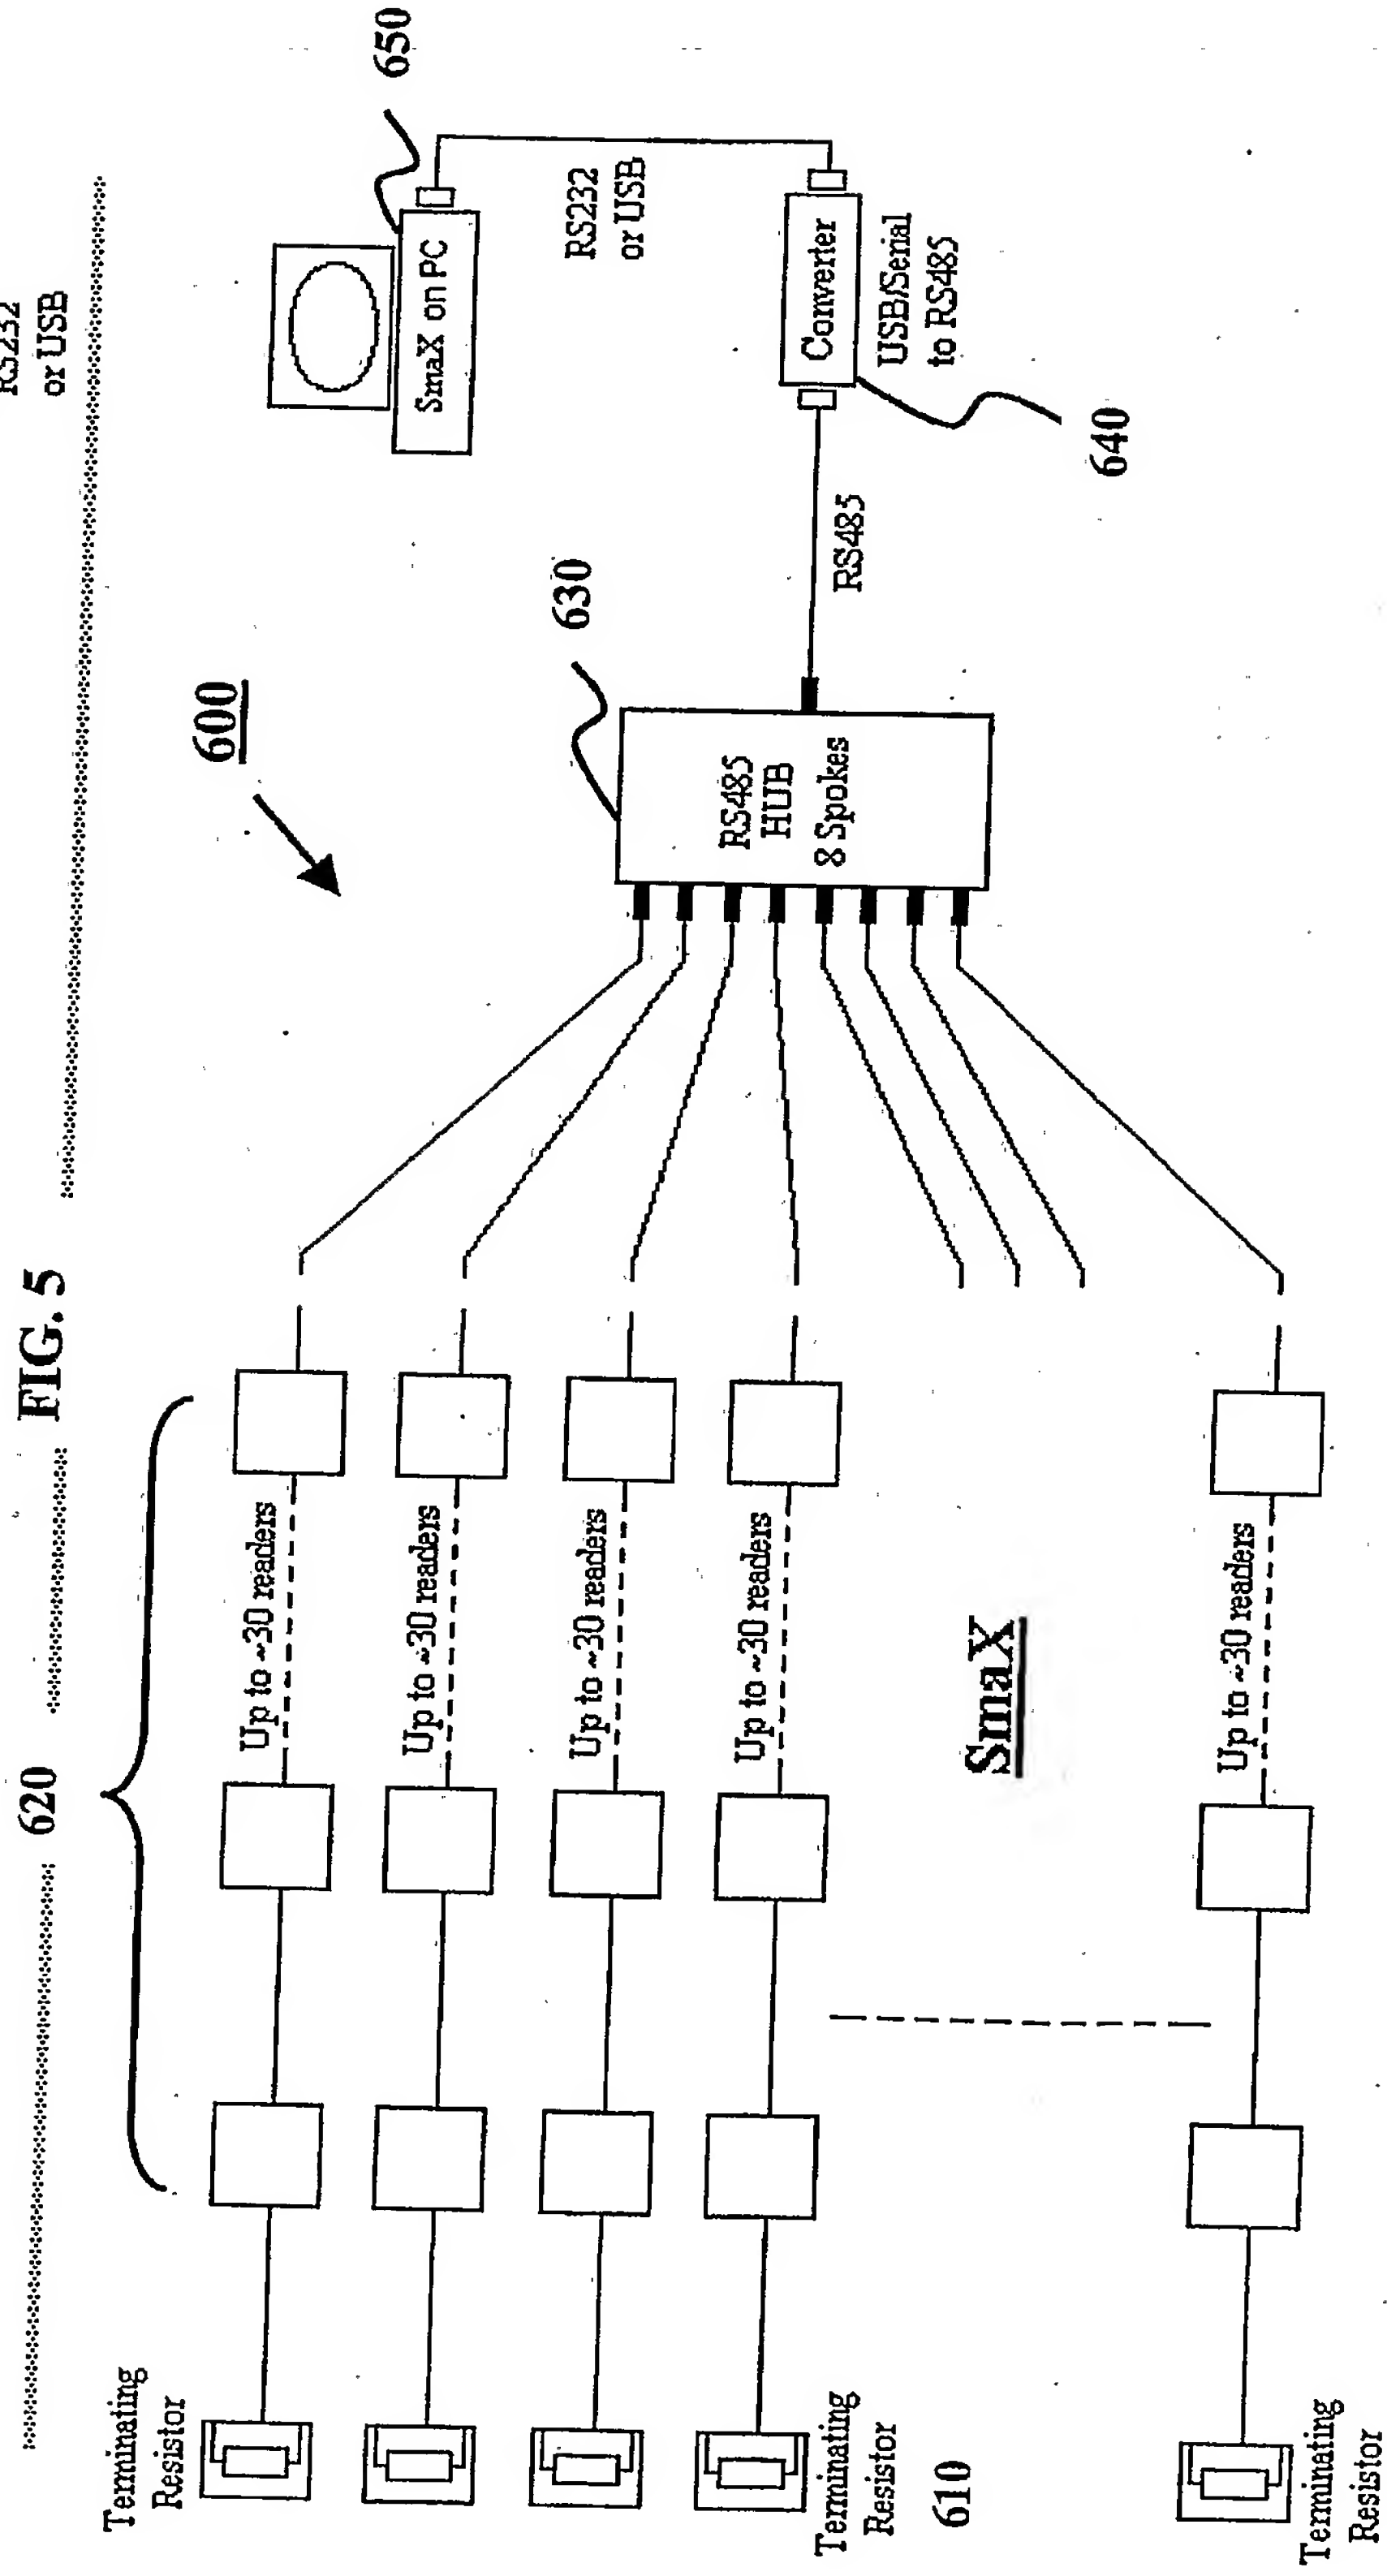


FIG. 6